


CDXconventional CSB-E

Conventional Sounder Base

Features

- ▶ Robust design
- ▶ Low current consumption
- ▶ Easy to install
- ▶ Maximum 93 dB(A) @ 1 metre (Tone 1)
- ▶ 32 user-selectable tones and 3 user-selectable volumes
- ▶ Lockable cap available
- ▶ EN54 Part 3 approved.

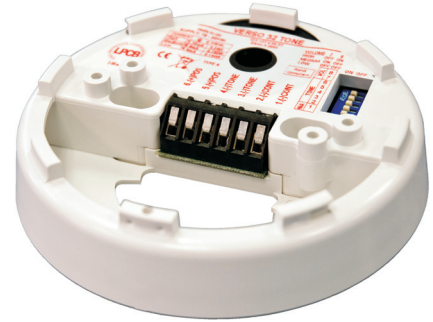

Description

The CSB-E is platform type sounder, which will accept the CDX Range of detectors mounted with an appropriate base*. The improved electronics result in a very low current consumption with a high sound output. A set of DIL switches are used to select the unit's tone and sound output (three settings, LOW, MEDIUM and HIGH).

Specification

Ordering codes	CSB-E - Ivory / CSB-E(WHT) - White / CS-CAP - Lockable cap		
Sound level	LOW	MEDIUM	HIGH
Sound output @ 1 metre: Tone 1	86.2 dB(A)	87.7 dB(A)	91.2 dB(A)
Current consumption @ 24 VDC	5.7 mA	7 mA	9.4 mA
Operating Voltage	18 – 30 VDC		
Number of tones	32		
Operating frequency	440 - 2900 Hz		
IP rating	IP21C		
Operating Temperature Range	-20 °C to +70 °C		
*Compatible CDX Bases	YBN-R/6, YBO-R/6PA, YBO-R/6R, YBO-R/6RN, YBO-R/6RS, YBN-R/6SK		
Compatible CDX Detectors	SLR-E3N, DCD-AE3, DCD-CE3, DFJ-AE3, DFJ-CE3		
Colour / Case Material	Ivory or White / ABS		
Weight (g) / Diameter (mm) / Height (mm)	110 / 116 / 25		
Base Fixing Centres (mm)	48 ~ 74		
Approvals	Approved to EN54 Part 3 by the LPCB and VdS on tones 1, 3, 11, 25 and 27.		